

FF0B-245S FLOOR BOX

The solid stainless steel surface lid is useful for installations where the flooring material is not required in a rebated cover. Two cord outlet ports fold into the box to allow cables to exit when in use.

STAINLESS STEEL SURFACE LID

SOLID LID

BEVELLED EDGE:
Fits on top of flooring finish



-LID SIZE: 245 mm x 245 mm



-BOX BODY SIZE: 228 mm x 230 mm x 110 mm

-SUPPLIED WITH:

1 x 4-Gang Power Outlet

2 x Standard 2-Gang Plate Only

FFOB-245S ASSEMBLY

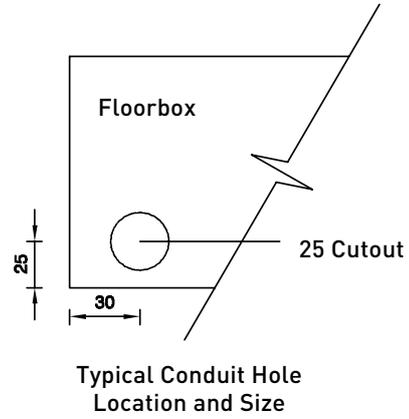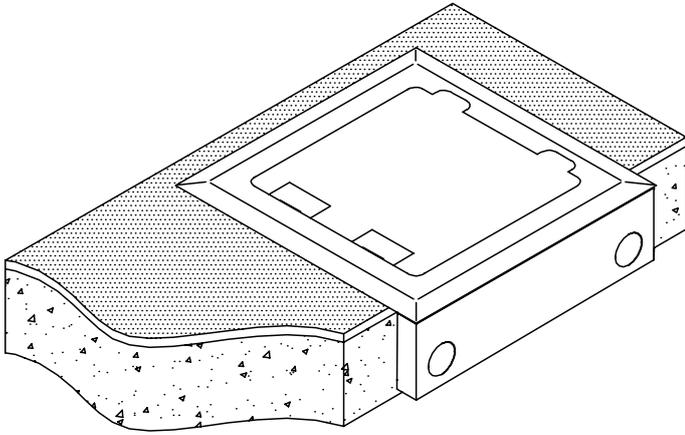

FEATURES:

Stainless Steel 5 mm Hinged Cover screw fix to steel box body.

2 x cable exit ports fold down when in use to allow cables to exit with the main cover closed.

Steel box body (228 x 230 x 110 mm deep) 8 No. 25 mm conduit knockouts (2 on each side).
Box body can be cast directly into concrete or into a preformed recess (250 x 250 x 130 mm deep).

Recess Size: **Nom.** 250 x 250 x 130 mm deep.

