

# CF C-Fix for impact mounting



## Areas of application:

For mounting pipes to the inner side of plasterboard walls.

## Installation guide:

- Put the flexible pipe into the CF
- Hammer in the CF at the desired location

## Product details:

Pipe Ø	Type	Content pack/box	Article number
16	CF 16	100 / 3.200	9116
20	CF 20	75 / 2.400	9120
25	CF 25	50 / 1.600	9125



## Product benefits/properties:


The C-Fix clip enables piping to be mounted to drywalls quickly and easily. The unique design ensures a strong grip and does not damage the outside of the wall.

The flexible installation pipe is inserted into the CF, the CF is hit with a hammer – done!

## Technical data:

Material	Chromed steel, rustproof raw material fulfilling EU guideline 2002/95/EG RoHS
Weight per piece*	4.4 g; 5.2 g; 6.4 g
Max. recd. load CF 20	85 N Plasterboard 15 mm, 110 N Plasterboard 25 mm
Max. recd. load CF 25	90 N Plasterboard 15 mm, 110 N Plasterboard 25 mm
Breaking load CF 20	119.60 N Plasterboard 15 mm; 169.00 N Plasterboard 25 mm
Breaking load CF 25	128.00 N Plasterboard 15 mm; 168.00 N Plasterboard 25 mm
EAN-Codes*	9008439-1164, -1201, -1256

\* Listed in product overview order

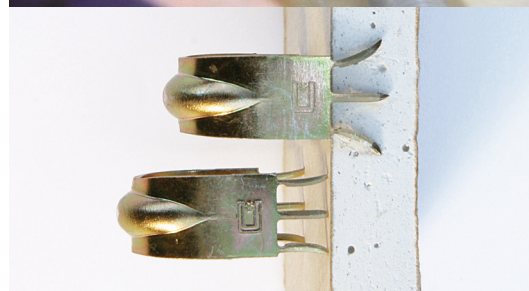

*The C-Fix clip enables piping to be mounted to drywalls quickly and easily without drilling. The unique design ensures a strong grip and does not damage the outside of the wall.*

Schnabl Stecktechnik GmbH  
Bahnhofplatz 1, 3100 St. Pölten, Austria  
Telephone +43 (0) 2742/221 67-0, Fax +43 (0) 2742/221 67-50  
office@schnabl-steck.at, www.schnabl-steck.at

 **Schnabl®**