


## Areas of application:

For the conduit laying of non-metallic sheathed cables. The KB 10 cable bracket can hold up to 10 cables (3 x 1.5 mm<sup>2</sup>) and the KB 20 up to 20 cables (3 x 1.5 mm<sup>2</sup>).

## Installation guide:

- Drill a 6 mm Ø hole
- Insert the KB into the drill-hole
- Insert the cable/s into the gap between the wall or ceiling.
- If required up to two EC clamps, in any pipe diameter size can be attached directly to the KB

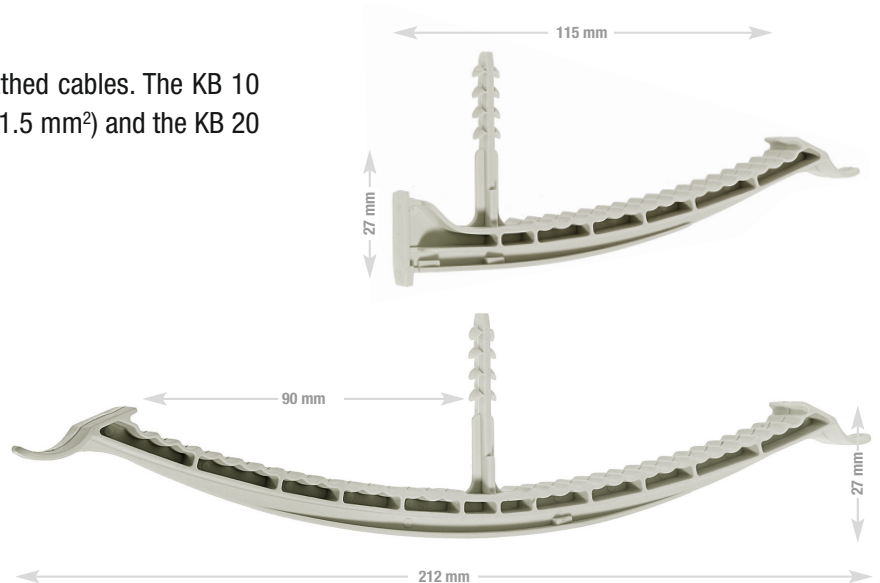

## Product details:

Clamping range in mm	Type	Content pack/box	Article-number
100	KB 10	50 / 1.000	30420
200	KB 20	25 / 600	30440

## Product benefits/properties:

Perfect and quick laying of multiple cables directly on the ceiling. Insert the KB with minimal effort, then lay the cable. The KB's own internal stress is sufficient to ensure the cable is mounted firmly even against high temperature fluctuations. Unique attachment option for the EC Euro Clip – for retrofitting of a pipe or the separate laying of different cables – without the need for drilling.

## Technical data:

Material	halogen-free, PP, light grey, UV stabilised, temperature range: -10 °C bis +85 °C, silicon-free
Weight per piece*	6.7 g; 11.3 g
Max. load**	240 N concrete, 230 N solid brick
Breaking load**	343.70 N concrete; 331 N solid brick
EAN-codes*	9008439-304202, - 304400

\* Listed in product overview order  
 \*\* for KB 10



The KB cable brackets have been developed for the section installation of wiring harnesses.