



VYNCO **LIGHTING**

2018/19

ORDER CODES IN BOLD: WE ENDEAVOUR TO KEEP IN STOCK

ORDER CODES IN LIGHT: SUBJECT TO AVAILABILITY, MOQS AND LEAD TIMES MAY ALSO APPLY

IES FILES AVAILABLE ON REQUEST

Vynco Industries (NZ) Limited has endeavoured to provide accurate and correct information in this publication.

Vynco Industries (NZ) Limited does not accept responsibility for any inadvertent errors or admissions contained in this catalogue, and reserves the right to change specifications and prices at any time without notice.

All warranties are voided if fitting is not installed to manufacturer instructions.

ALL TRADE PRICES LISTED ARE EXCLUDING GST

VYNCO LIGHTING

2018/19

LED INTERIOR FITTINGS

	De Niro	6
	McQueen	14
	Jolie	16
Downlights	Streep	18
Oyster	Crawford	20
Panels	Pacino	22
Low Glare Panels	Pacino	22
	Theron	24
Battens	Monroe	26
High Bay	Eastwood	28


LED EXTERIOR FITTINGS

Up/Down Light	Exoled	32
Floodlights	Stallone	34
Professional Floodlights	Hogan	36
Weatherproof Batten	Connery	38
Slim Weatherproof Batten	Hepburn	40



INTERIOR



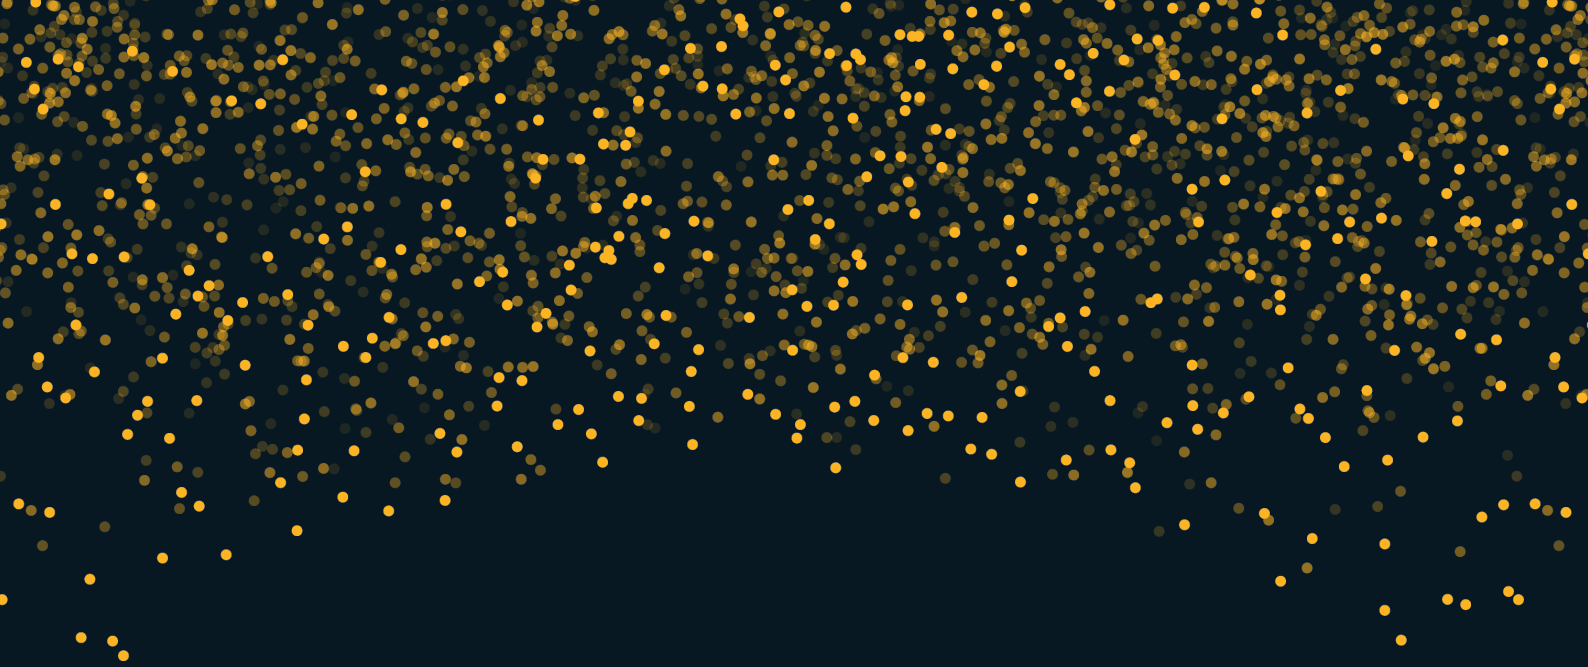


DE NIRO

NEW-BUILD 90MM LED DOWNLIGHT



DE NIRO


- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare
NC3	White	8	700	3000	90 Ø	70-80	UGR<22
NC4	White	8	730	4000	90 Ø	70-80	UGR<22
NC3S	Silver	8	700	3000	90 Ø	70-80	UGR<22
NC4S	Sliver	8	730	4000	90 Ø	70-80	UGR<22
NC3B	Black	8	700	3000	90 Ø	70-80	UGR<22
NC4B	Black	8	730	4000	90 Ø	70-80	UGR<22

High Output units can be made available on request subject to lead time.

Made to order locally, short delays may occur.

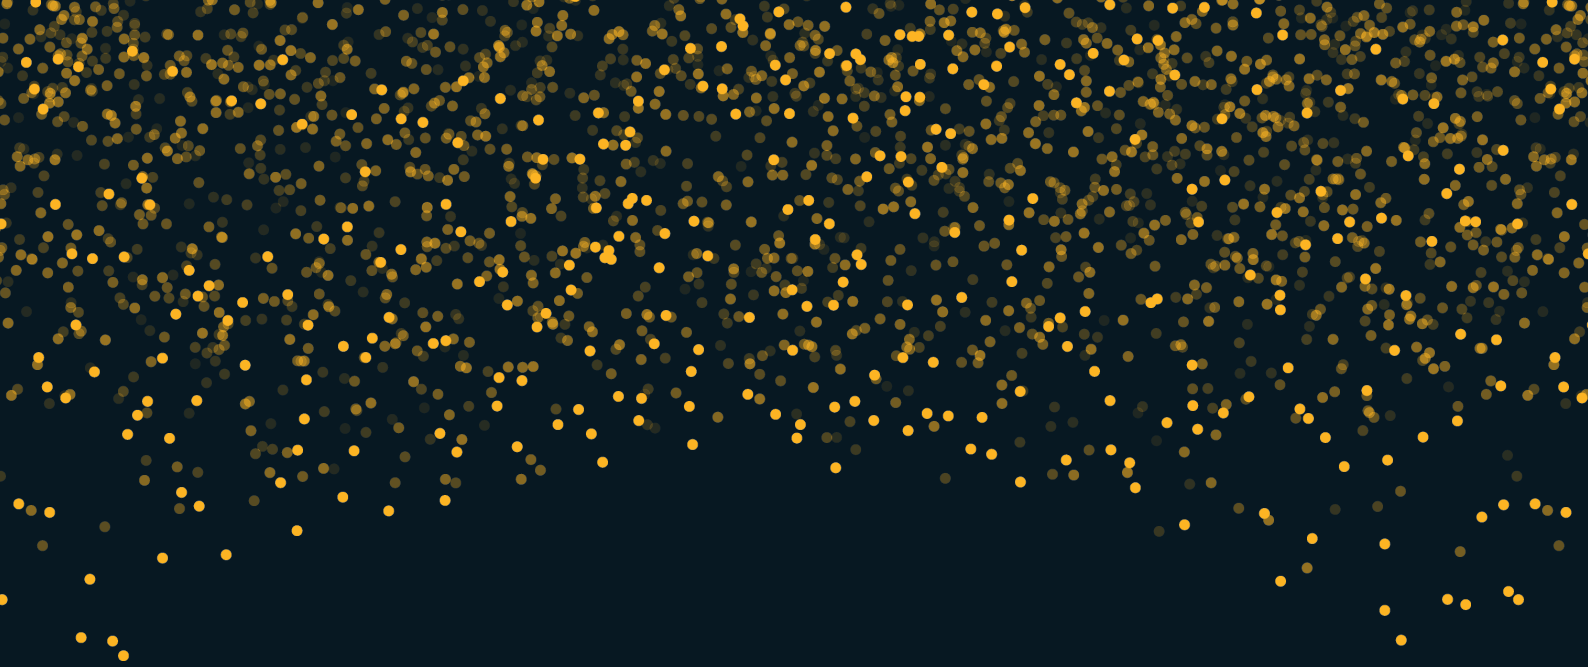


DE NIRO

RETROFIT 110MM LED DOWNLIGHT




DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare
NR3	Retro White	8	700	3000	110 Ø	70-92	UGR<22
NR4	Retro White	8	730	4000	110 Ø	70-92	UGR<22
NR3S*	Retro Silver	8	700	3000	110 Ø	70-92	UGR<22
NR4S*	Retro Silver	8	730	4000	110 Ø	70-92	UGR<22
NR3B*	Retro Black	8	700	3000	110 Ø	70-92	UGR<22
NR4B*	Retro Black	8	730	4000	110 Ø	70-92	UGR<22

High Output units can be made available on request subject to lead time. *Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.

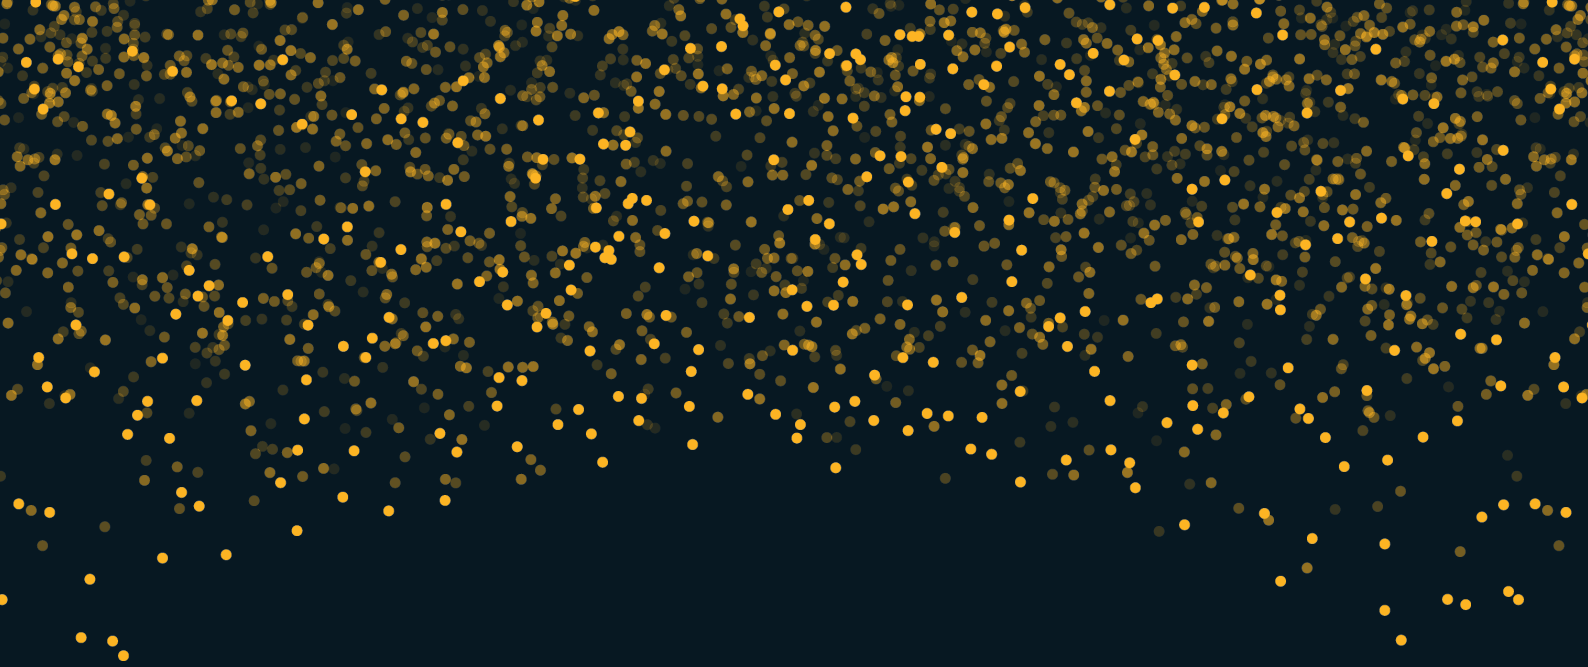

DE NIRO

SQUARE LED DOWNLIGHT



DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare
NSQ3	Square White	8	700	3000	110 SQ	92	UGR<22
NSQ4	Square White	8	730	4000	110 SQ	92	UGR<22
NSQ3S*	Square Silver	8	700	3000	110 SQ	92	UGR<22
NSQ4S*	Square Silver	8	730	4000	110 SQ	92	UGR<22
NSQ3B*	Square Black	8	700	3000	110 SQ	92	UGR<22
NSQ4B*	Square Black	8	730	4000	110 SQ	92	UGR<22

High Output units can be made available on request subject to lead time. *Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.




DE NIRO

LOW GLARE LED DOWNLIGHT




DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Low Glare option in the De Niro Range
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare
NLG3	Low Glare White	8	700	3000	110 Ø	92	UGR<19
NLG4	Low Glare White	8	730	4000	110 Ø	92	UGR<19
NLG3S*	Low Glare Silver	8	700	3000	110 Ø	92	UGR<19
NLG4S*	Low Glare Silver	8	730	4000	110 Ø	92	UGR<19
NLG3B*	Low Glare Black	8	700	3000	110 Ø	92	UGR<19
NLG4B*	Low Glare Black	8	730	4000	110 Ø	92	UGR<19

High Output units can be made available on request subject to lead time. *Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.

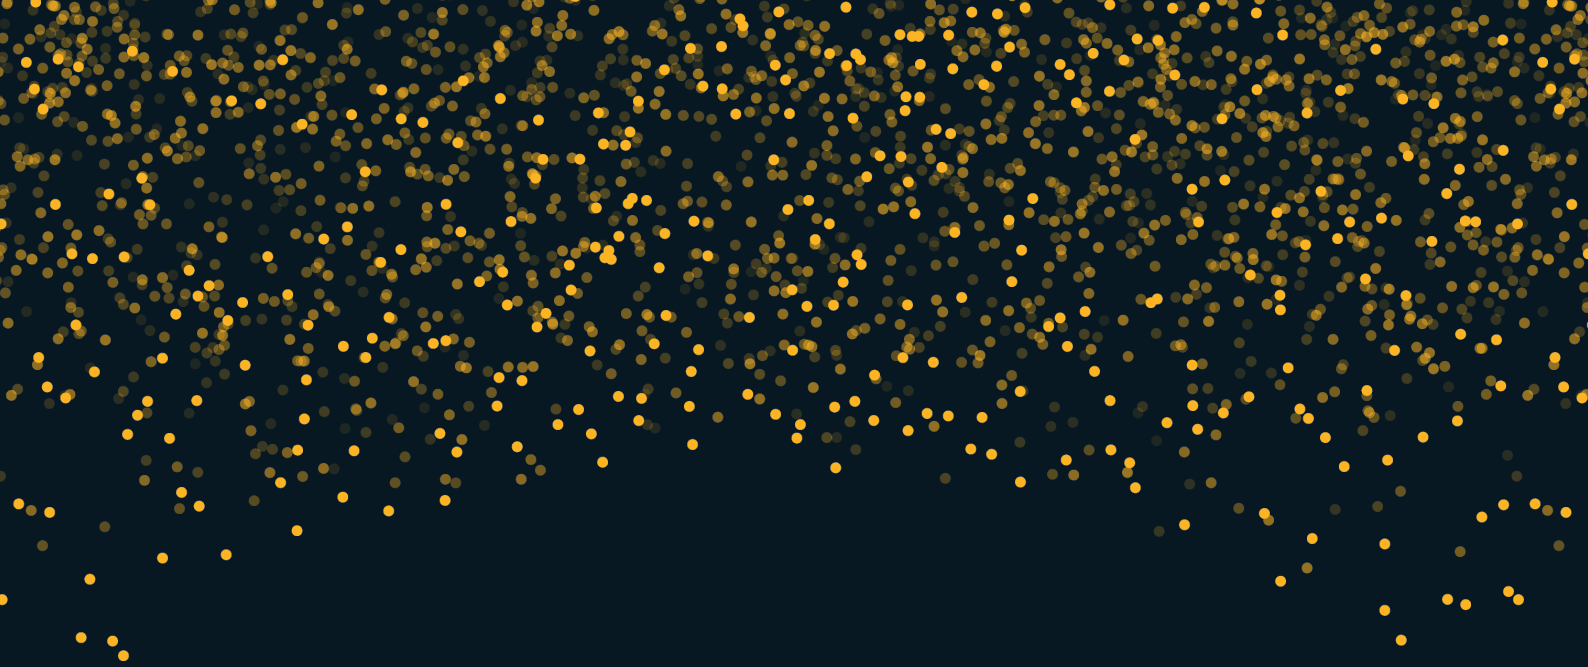


MCQUEEN

COLOUR CHANGING LED
DOWNLIGHT




MCQUEEN

- The colour temperature can be changed using a toggle switch on the back of the fitting
- The fitting itself is super slim, 32mm profile
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Beam Angle
M3	8	700	3000	105	90	90
		720	4000			
		750	6000			
M4	12	900	3000	130	105	100
		960	4000			
		960	6000			

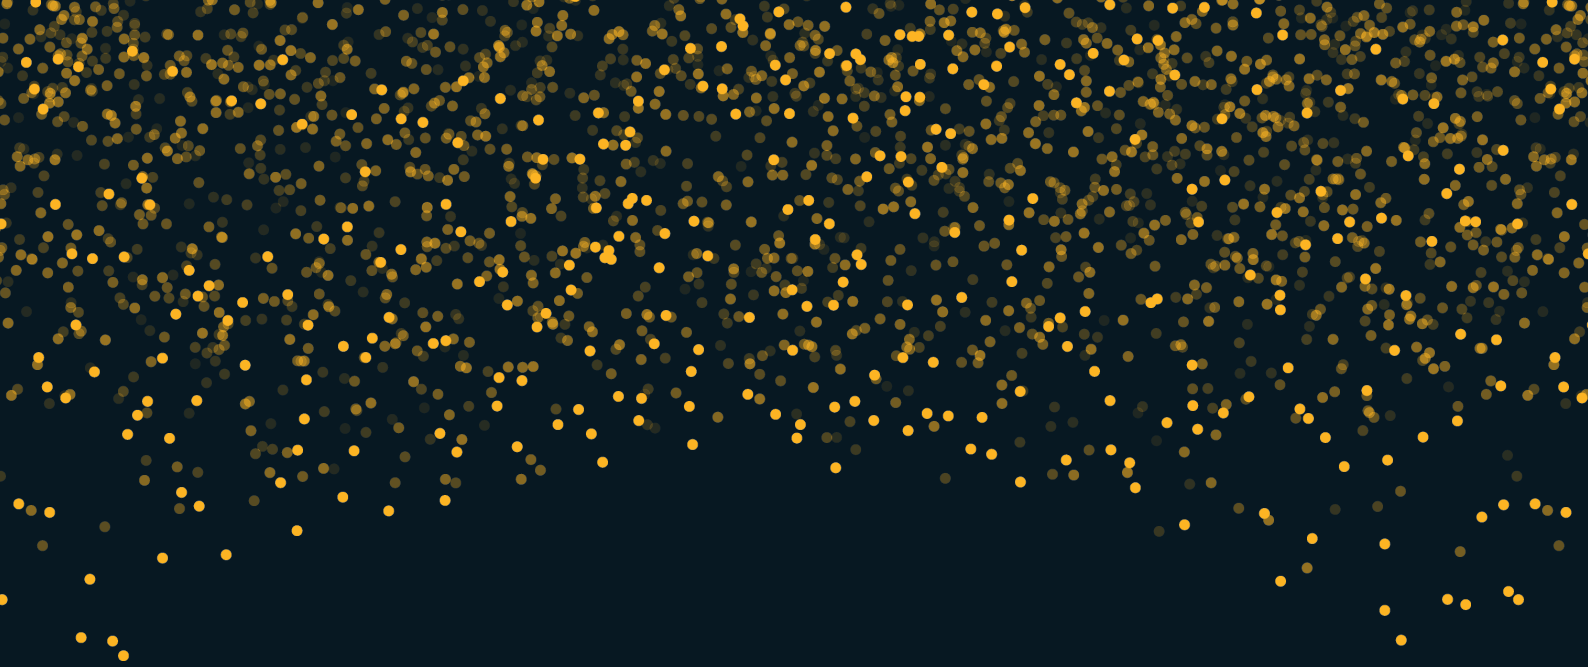


JOLIE

COLOUR CHANGE LED
DOWNLIGHT




JOLIE

- Integrated fitting and driver
- Protected against bug/insect entry
- The colour temperature can be changed using a toggle switch on the back of the fitting
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials
- Quick Connect terminals
- Driver IP40 Rated, Fascia IP54, suitable for laundries and bathrooms



Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)
VE3C	8	860	3000	115	90-100
		870	4000		
		900	5700		

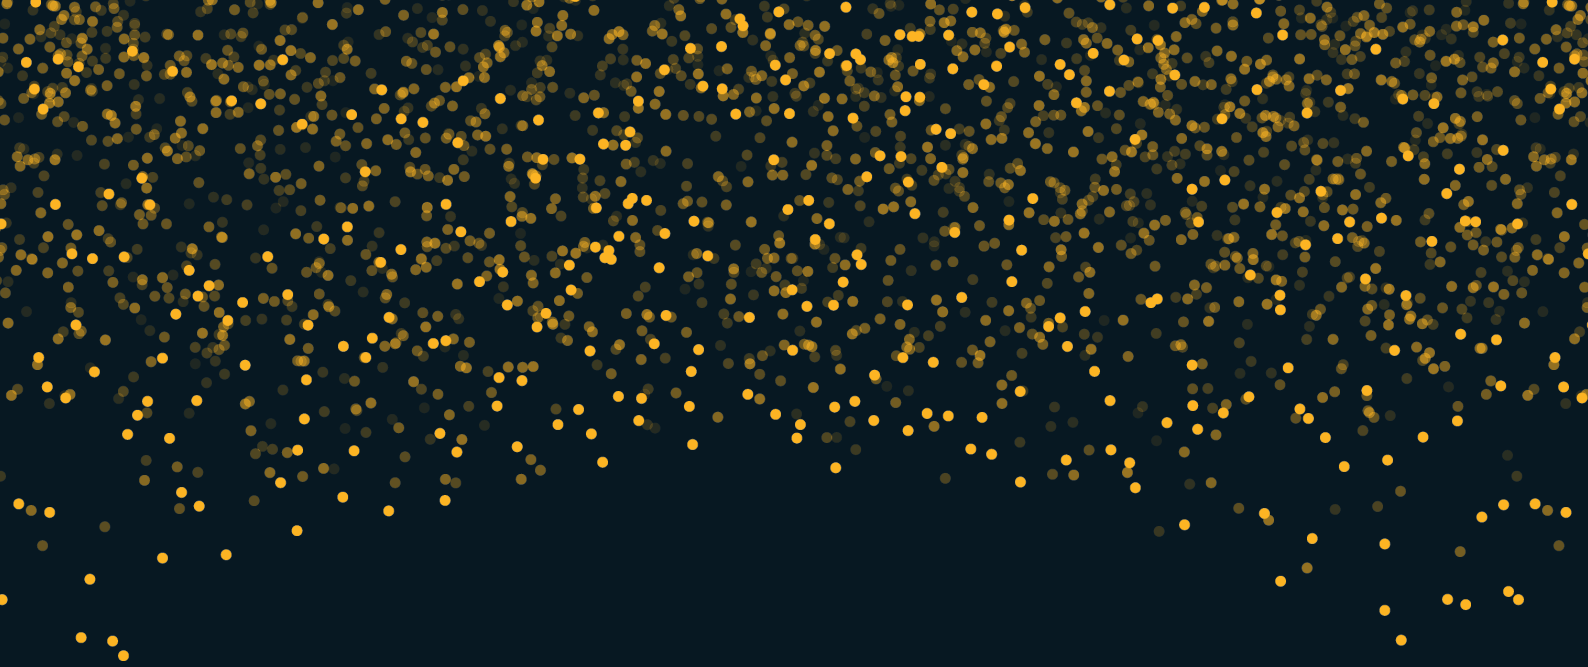

STREEP

COLOUR CHANGING COMMERCIAL
LED DOWNLIGHT RANGE



STREEP

- The colour temperature can be changed using a toggle switch on the back of the fitting
- The 5 inch unit is IC-4 and IC-F Rated, can be abutted and covered with approved insulation materials, the larger sizes cannot
- 50,000 Lifetime hours under normal conditions
- 0°C to +45°C Operating temperature
- DALI or 1-10V Dimming available on request (subject to MOQs)



Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare
VM5*	10	1100	3000	140	125	UGR<19
		1130	4500			
		1160	5700			
VM6	12	1250	3000	165	150	UGR<19
		1290	4800			
		1330	5700			
VM8	16	1650	3000	193	180	UGR<19
		1700	4000			
		1750	5700			
VM10	21	<i>Coming Soon!</i>				

*Beam angle 75°. Available on request.



CRAWFORD

COLOUR CHANGING LED OYSTER



CRAWFORD

- The colour temperature can be changed using a toggle switch on the back of the fitting
- Operating Temperature -20°C to +45°C
- 50,000 Lifetime hours under normal conditions
- Dimmable
- White gasket used, instead of standard black, so that it cannot be seen through the lens from the front



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimension (mm)
V0183	18	1760	3000	300 x 52
		1900	4000	
		1860	5700	
V0253	25	2320	3000	300 x 52
		2550	4000	
		2450	5700	
V0304	30	2700	3000	400 x 52
		3000	4000	
		2900	5700	




PACINO

LED PANELS



PACINO

- Vynco Panels employ a unique non-prismatic style frosted diffuser
- Material used for diffuser is PMMA (Acrylic) and not traditional PS (Polystyrene) which can discolour with UV exposure
- LEDs are mounted on all four edges
- Thicker, double-side welded frame for added structural strength
- 50,000 Lifetime hours under normal conditions
- 0-10V, Phase dimming options and DALI dimming available on request (subject to MOQs)

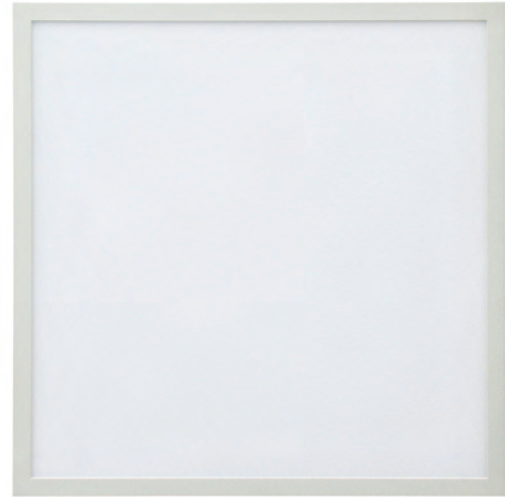

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Glare
P664	36	3240	4000	600 x 600	3.5kg	UGR<23
P666	36	3240	6000	600 x 600	3.5kg	UGR<23
P1234	36	3240	4000	1200 x 300	3.2kg	UGR<23
P1236	36	3240	6000	1200 x 300	3.2kg	UGR<23
P1264	72	6480	4000	1200 x 600	6.2kg	UGR<23
P1266	72	6480	6000	1200 x 600	6.2kg	UGR<23
P664L	36	2920	4000	600 x 600	3.5kg	UGR<19
P666L	36	2920	6000	600 x 600	3.5kg	UGR<19
P1234L	36	2920	4000	1200 x 300	3.2kg	UGR<19
P1236L	36	2920	6000	1200 x 300	3.2kg	UGR<19
P1264L	72	5830	4000	1200 x 600	6.2kg	UGR<19
P1266L	72	5830	6000	1200 x 600	6.2kg	UGR<19



THERON

LED BATTENS




THERON

- Extruded aluminium body and base with opaque Polycarbonate Lens
- Reflector assembly designed to simply plug into driver and clip to base without the use of tools
- Easy install base
- Centre mains entry
- 50,000 Lifetime hours under normal conditions
- Operating Temperature -20°C to +45°C



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions	Glare
BT154	White	50	6000lm	4000	1500 x 102 x 83	UGR >19

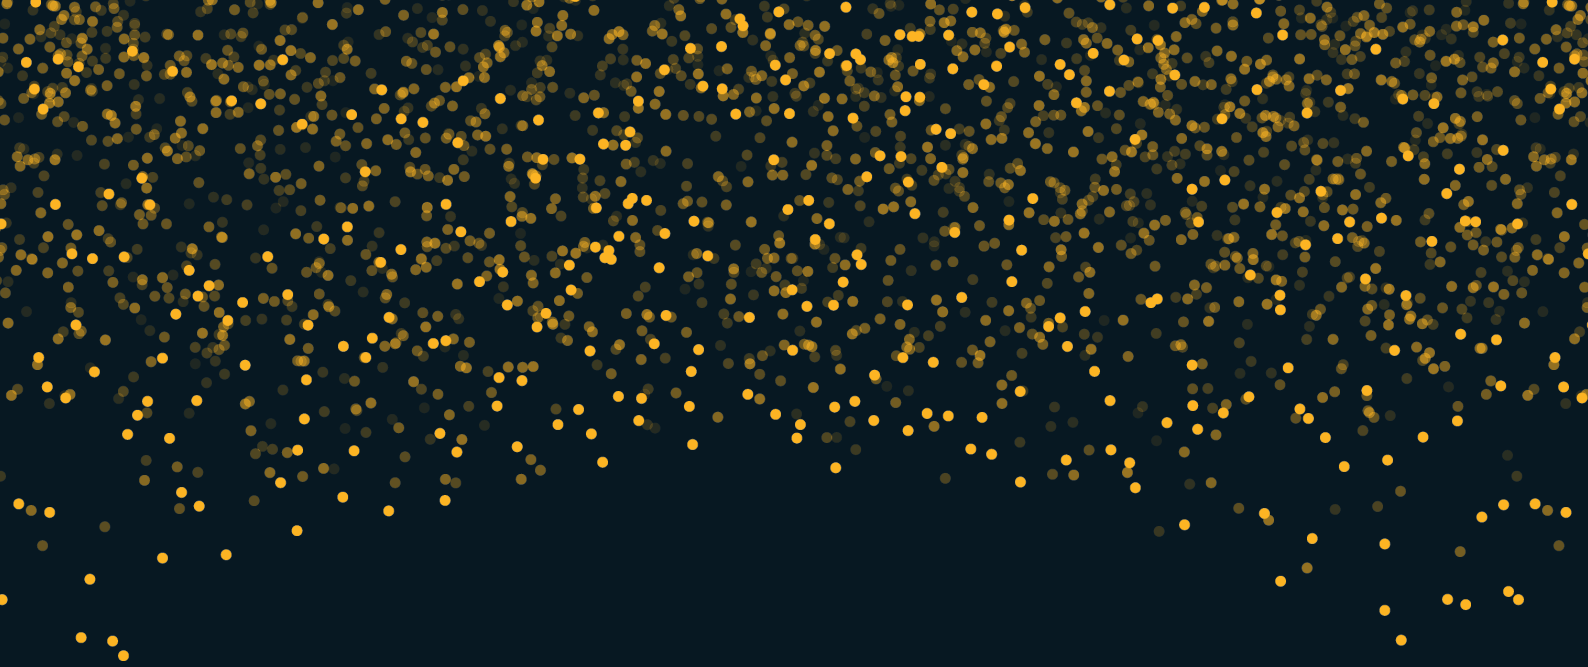

MONROE

LED BATTENS



MONROE

- Osram Driver, Epistar LED Chip
- Polycarbonate Diffuser
- Wide body helps to cover existing ceiling damage from previous fittings
- Emergency and Sensing options available
- Sensor unit spec: 360° detection angle, 1-8m Detection range, Time setting range: 10 sec – 10 min, Light control: 10-2000 Lux
- Emergency unit spec: 3 Hour Emergency Operation, Recharge time: 20 Hours, Intelligent automatic recharge function, Test switch with self-test function



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Glare
B1224	50	5000	4000	1200 x 200 x 68	UGR<23
B1524	70	7000	4000	1500 x 200 x 68	UGR<23

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)
B1224E	Emergency Batten	50	1000	4000	1200 x 200 x 68
B1224S	Sensing Batten	50	5000	4000	1200 x 200 x 68
B1224ES	Emergency & Sensing Batten	50	1000	4000	1200 x 200 x 68
B1524E	Emergency Batten	70	1400	4000	1500 x 200 x 68
B1524S	Sensing Batten	70	7000	4000	1500 x 200 x 68
B1524ES	Emergency & Sensing Batten	70	1400	4000	1500 x 200 x 68

Made to order locally, short delays may occur.



EASTWOOD

HIGH BAY



EASTWOOD

- 120 Lumens per Watt efficacy
- 50,000Hr lifespan under normal conditions
- Acrylic Lens (not glass), can be used in supermarkets and other food related spaces.
- 1.5m flex and plug
- Lumiled 3030 LED Chip, Meanwell Driver
- Operating Temperature -40°C to +50°C
- Chain not included



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)
HB1505	150	18,000	5000	320 Ø x 189 H	5.6
HB2005	200	24,000	5000	320 Ø x 189 H	6.2


Sensor options available on request. MOQs may apply.



IP65

EXTERIOR



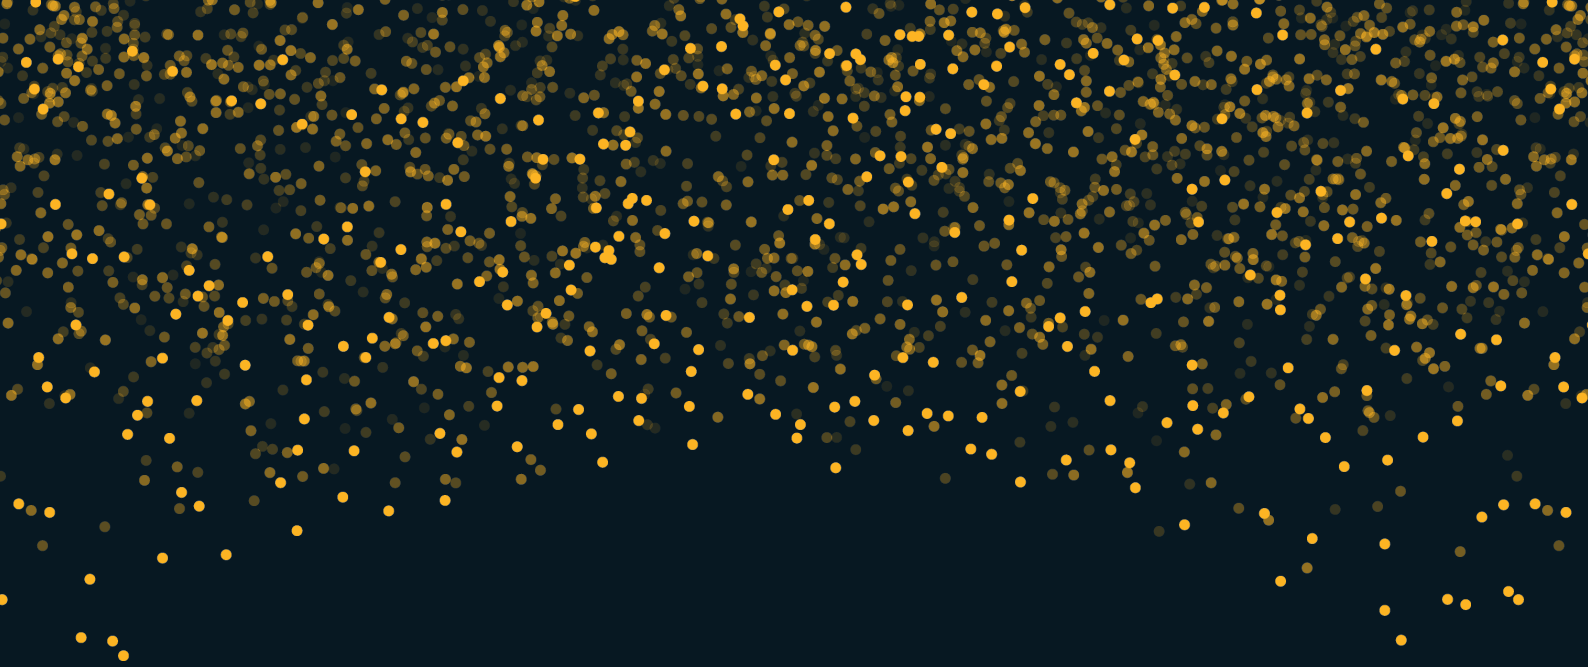

EXOLED

LED UP/DOWN LIGHT




EXOLED

- 316 Marine Grade Stainless Steel, suitable for outdoor use, even in locations close to the ocean
- Outlasted several competitor units in a salt spray test
- Choose the Spot fitting for adjustable directional lighting



Code	Type	Power (W)	Lumens Output	Dimensions (mm)	Finish
VE3WUD	Up & Down	2x 3W LED	520	63 x 142 x 94	316 Stainless Steel
VE3WS	Spot	3W LED	240	63 x 63 x 148 (when straight)	316 Stainless Steel
VE3WF	Fixed	3W LED	240	63 x 83 x 94	316 Stainless Steel

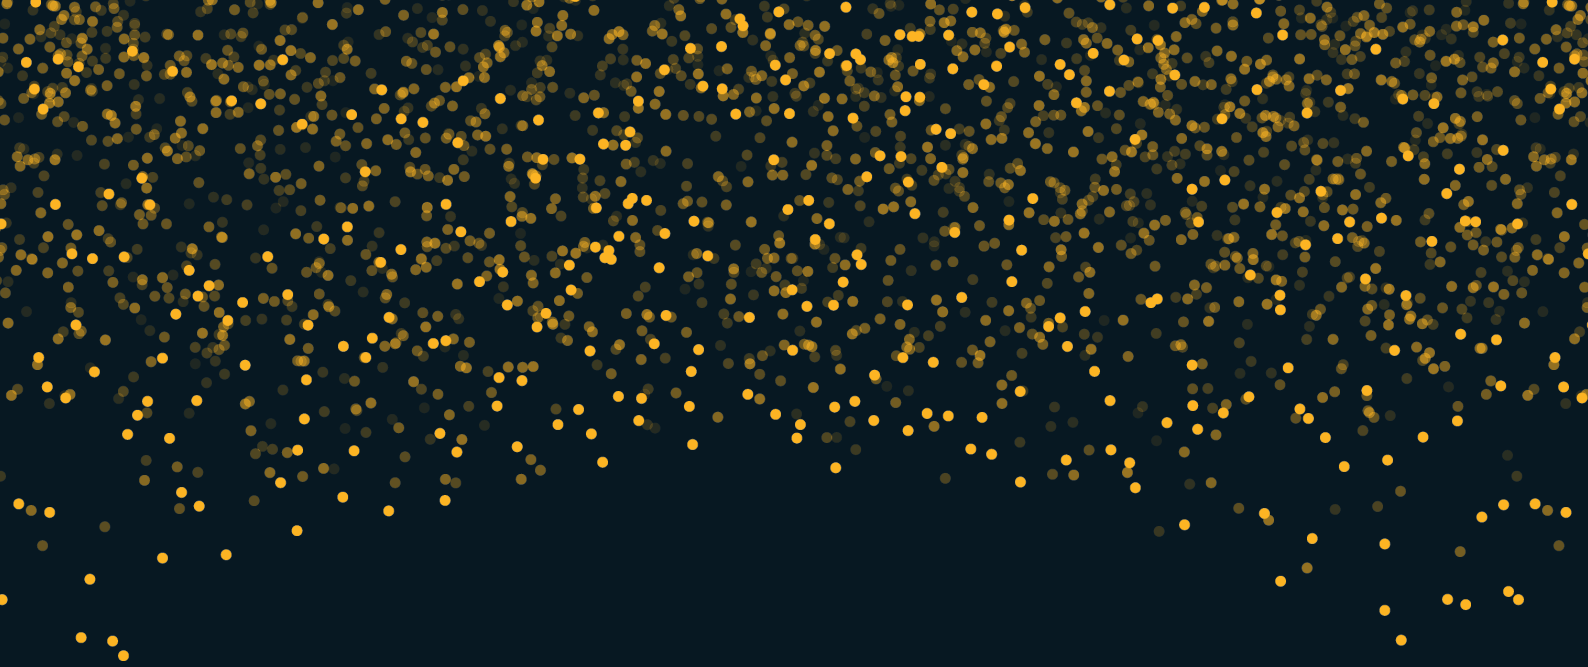

STALLONE

LED FLOODLIGHT



STALLONE

- 50,000 Lifetime hours under normal conditions
- Up to 110 Lumens per Watt
- 270° hinge rotation
- Meanwell driver and Osram chip
- Operating temp range: -40°C to +50°C
- 1 meter long lead



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Colour
F105	10	1,000	5000	166 x 107 x 32	0.6kg	Black
F305	30	3,000	5000	226.5 x 167 x 40	1.4kg	Black
F505	50	5,000	5000	310.5 x 220 x 47.5	2.1kg	Black
F1005	100	11,000	5000	402.5 x 295 x 53.5	5.1kg	Black
F1505	150	16,500	5000	430.5 x 330 x 53.5	6.2kg	Black
F2005	200	22,000	5000	470.5 x 360 x 53.5	7.1kg	Black



HOGAN

PROFESSIONAL LED FLOODLIGHT




HOGAN

- 50,000 Lifetime hours under normal conditions
- 110 Lumens per Watt
- Osram LED Chips and Meanwell Driver
- Working temperature -40°C to +45°C
- Available in 4000k-7000k, with 6 rectangle beam angle options – inquire today to discuss your project requirements (Codes below refer only to 5000k versions at 65x135° beam angles)
- Protective UV stabilised powder coated finish aluminium body, tempered glass optical cover
- Designed for sports, site and area applications such as: Class I, II & III outdoor sports fields and courts, indoor arenas, signage and billboards, ports and depots, building facades, and all heavy industrial and wet locations



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Colour
FP2005	200	25,300	5000	507 x 367 x 244	8.8	Black
FP2505	250	31,050	5000	567 x 367 x 244	12	Black
FP3005	300	37,950	5000	567 x 367 x 244	12.5	Black
FP3505	350	42,550	5000	533 x 621 x 384	18.5	Black
FP4005	400	50,600	5000	533 x 621 x 384	19.5	Black
FP5005	500	63,250	5000	593 x 621 x 384	20	Black
FP6005	600	71,300	5000	593 x 621 x 384	22	Black
FP8005	800	101,200	5000	833 x 621 x 384	29	Black
FP10005	1000	126,500	5000	723 x 724 x 478	30	Black

PROJECT ITEM: Other Colour Temperatures, fitting colours and beam angles available to order, please inquire for further information. Subject to MOQs.

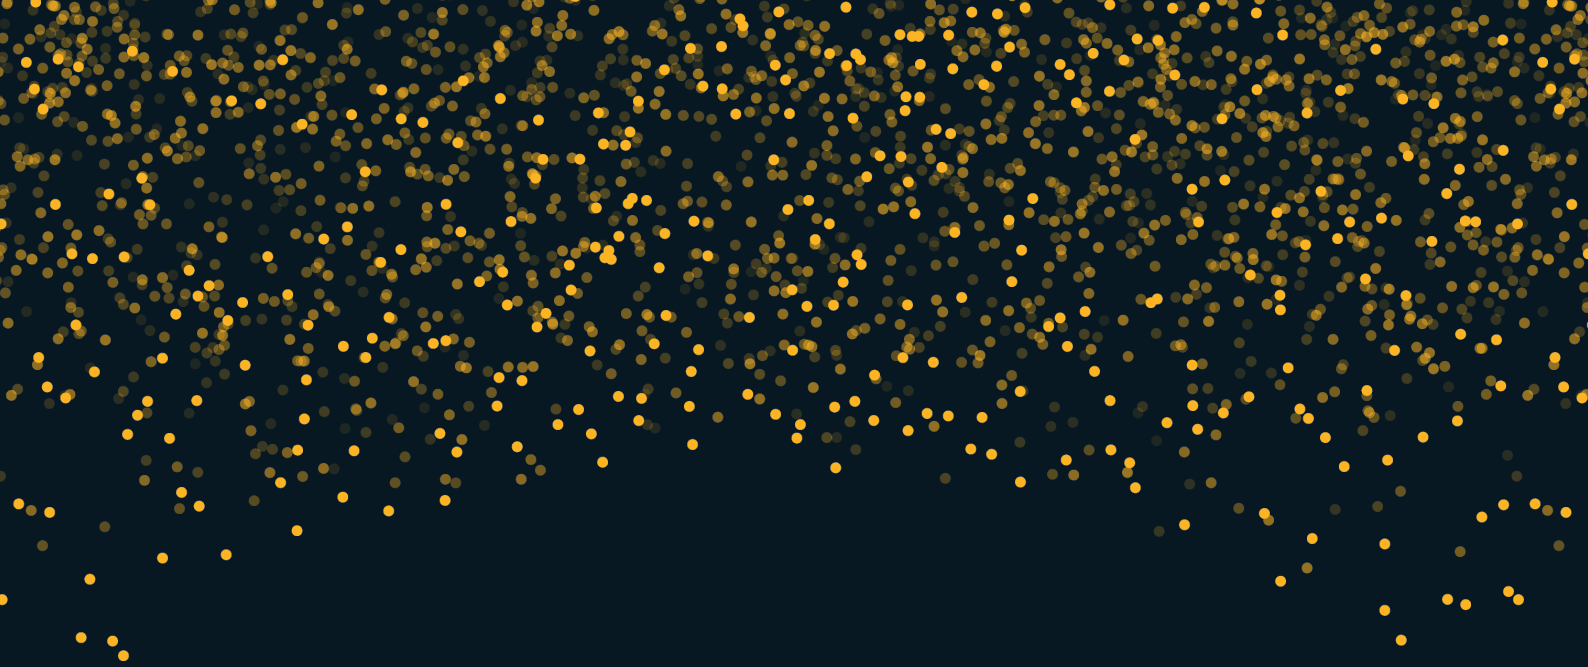

CONNERY

WEATHERPROOF LED UNDER VERANDA



CONNERY

- Operating Temperature -20°C to +35°C
- ABS Body and Polycarbonate Diffuser – 105mm H x 158mm W
- Emergency and Sensing options available
- Sensor unit spec: 360° detection angle, 1-8m Detection range, Time setting range: 10 sec – 10 min, Light control: 10-2000 Lux
- Emergency unit spec: 3 Hour Emergency Operation, Recharge time: 20 Hours, Intelligent automatic recharge function, Test switch with self-test function
- 50,000 Lifetime hours under normal conditions



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)
VU2	28	2500	4000	658 x 158
VU4	56	5000	4000	1268 x 158
VU5	70	6300	4000	1568 x 158
VU56	70	6300	6500	1568 x 158

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)
VU4E	Emergency	56	720	4000	1268 x 158
VU4S	Sensing	56	3600	4000	1268 x 158
VU4ES	Emergency & Sensing	56	720	4000	1268 x 158
VU5E	Emergency	70	1025	4000	1568 x 158
VU5S	Sensing	70	5120	4000	1568 x 158
VU5ES	Emergency & Sensing	70	1025	4000	1568 x 158
VU56E	Emergency	70	1060	6500	1568 x 158
VU56S	Sensing	70	5300	6500	1568 x 158
VU56ES	Emergency & Sensing	70	1060	6500	1568 x 158

Made to order locally, short delays may occur.



HEPBURN

SLIM WEATHERPROOF LED
UNDER VERANDA




HEPBURN

- Slim body version of the Connery, body width is 100mm, height is 70mm
- Operating Temperature -20°C to +45°C
- ABS Body and Polycarbonate Diffuser
- 0.5 Second Quick Start
- 40,000 Lifetime hours under normal conditions
- Includes Stainless Steel brackets



Hepburn



Connery

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)
VUS5	70	6000	4000	1500 x 100
VUS56	70	6000	6500	1500 x 100

CONTACT US

Vynco Industries NZ Limited

AUCKLAND OFFICE

9 Levene Place, Mt Wellington, Auckland 1060
PO Box 12 249, Penrose, Auckland 1642
New Zealand

P +64 9 525 6051 **F** +64 9 525 5799

E vyncoauck@vynco.co.nz

CHRISTCHURCH OFFICE

388 - 396 Tuam Street, Philipstown, Christchurch 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand

P +64 3 379 9283 **F** +64 3 379 6838

E chchsales@vynco.co.nz

Stock is available for pick up from the above locations at your convenience.

fb/vyncoindustriesltd

www.vynco.co.nz

