



BATTEN SOLUTIONS

RANGE OF INDOOR LED BATTENS

VYNCO LIGHTING

WWW.VYNCO.CO.NZ

WIDE INDOOR



MONROE

WIDE BODY LED BATTEN



- Osram Driver, Epistar LED Chip
- Polycarbonate Diffuser
- Wide body helps to cover existing ceiling damage from previous fittings
- Emergency and Sensing options available
- Sensor unit spec: 360° detection angle, 1-8m Detection range, Time setting range: 10 sec – 10 min, Light control: 10-2000 Lux
- Emergency unit spec: 3 Hour Emergency Operation, Recharge time: 20 Hours, Intelligent automatic recharge function, Test switch with self-test function

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Glare
B1224	50	5000	4000	1200 x 200 x 68	UGR<23
B1524	70	7000	4000	1500 x 200 x 68	UGR<23

INDOOR



COLOUR RENDERING
80




PROTECTION RATING
IP20



5
YEAR
WARRANTY

THERON

LED BATTEN

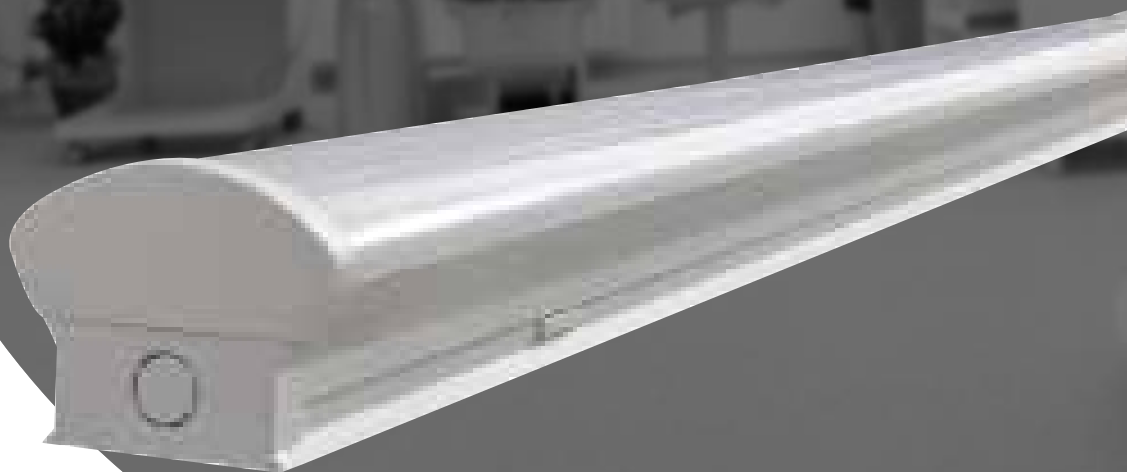

R&DTM

- Extruded aluminium body and base with opaque Polycarbonate Lens
- Reflector assembly designed to simply plug into driver and clip to base without the use of tools

- Easy install base
- Centre mains entry
- 50,000 Lifetime hours under normal conditions
- Operating Temperature -20°C to +45°C



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions	Glare
BT154	White	50	6000lm	4000	1500 x 102 x 83	UGR 23



EMERGENCY AND SENSING VERSIONS

ENQUIRE TODAY ABOUT YOUR PROJECT REQUIREMENTS

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)
B1224E	Emergency Batten	50	1000*	4000	1200 x 200 x 68
B1224S	Sensing Batten	50	5000	4000	1200 x 200 x 68
B1224ES	Emergency & Sensing Batten	50	1000*	4000	1200 x 200 x 68
B1524E	Emergency Batten	70	1400*	4000	1500 x 200 x 68
B1524S	Sensing Batten	70	7000	4000	1500 x 200 x 68
B1524ES	Emergency & Sensing Batten	70	1400*	4000	1500 x 200 x 68

* When running on emergency supply.

Made to order locally, short delays may occur.